

(19) **World Intellectual Property Organization**  
International Office



(43) **International publication date**  
**30 June 2005 (30.06.2005)**


**PCT**

(10) **International Publication No.**  
**WO 2005/059380 A1**

<b>(51) International Patent Classification<sup>7</sup>:</b>	<b>F16B 37/04</b>	[DE/DE]; Thomaring 32, 79618 Rheinfelden (DE). <b>KOCH, Gerd</b> [DE/NL]; Elbereveldstr. 516, NL-6466KP Kerkrade (NL).
<b>(21) International Application No.:</b>	PCT/EP2004/013921	<b>(74) Attorney: RÜTTIGERS, Joachim;</b> A. Raymond GmbH & Co. KG, Teichstr. 57, 79539 Lörrach (DE).
<b>(22) International filing date:</b>	8 December 2004 (08.12.2004)	<b>(81) Designated countries</b> (unless otherwise stated, for each available type of national protective right): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
<b>(25) Language of submission:</b>	German	<b>(84) Designated countries</b> (unless otherwise stated, for each available type of regional protective right): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD,
<b>(26) Language of publication:</b>	German	
<b>(30) Priority data:</b>	103 59 110.9 17 December 2003 (17.12.2003) DE	
<b>(71) Applicant</b> (for all designated countries except the US): <b>A. RAYMOND &amp; CIE</b> [FR/FR]; 113, cours Berriat, F-38028 Grenoble (FR). <b>FORD-WERKE GMBH</b> [DE/DE]; Henry-Ford-Strasse 1, 50735 Cologne (DE).		
<b>(72) Inventor</b>		
<b>(75) Inventor/Applicant</b> (US only): <b>MOTSCH, Uwe</b>		

[Continued on next page]

**(54) Title:** DEVICE FOR CONNECTING A SUPPORT ELEMENT TO AN ADD-ON PIECE

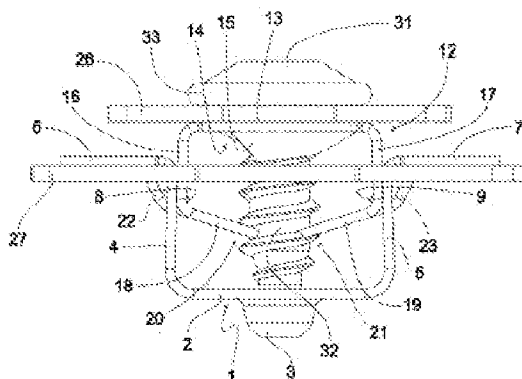

**(57) Abstract:** A device for connecting a support element (27) to an add-on piece (26) is provided with a plug-in element (1) that can be inserted in a recess of the support element (27) and that comprises at least one laterally projecting bearing section (6, 7) serving to bear externally against the support element (27), and an abutment region (3). An inner element (12) comprises a threaded region (14) for the screw (31) to be screwed into and at least one counter-element (22, 23). The inner element (12) is received in the plug-in element (1) so as to be axially displaceable. A threaded shank (32) of the screw (31) comes into engagement with the abutment region (3), which forms a stop for the screw (31) in the direction of insertion. The add-on piece (26) can thus be fixed at a distance from the support element (27).

[Continued on next page]



SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For the two-letter codes and other abbreviations, see the notes ("Guidance Notes on Codes and Abbreviations") provided at the beginning of each regular edition of the PCT Gazette.*

**Published:**

— with international search report